

SMS COVERALL

PRODUCT CODE: DOWSMS | DOBSMS | DOOSMS

DESCRIPTION


SMS Coverall with Triple Layer Polypropylene

FEATURES AND BENEFITS

- Lightweight and soft with excellent strength
- Elasticated wrists and ankles
- Zip Seal for increased particle protection
- Excellent breathability to reduce moisture build up
- Excellent barrier to dust and light splash
- Lint-free
- Good opacity
- Two way zipper for when nature calls
- Ready access to clothing underneath
- Sold and packaged individually

PRODUCT DETAILS

- Materials : SMS (Spunbond, Meltblown, Spunbond Triple Layer Polypropylene)
- Colour : White, Orange, Blue
- Sizes : M (168-176cm x 92-100cm);
L (174-182cm x 100-108cm);
XL (180-188cm x 108-116cm);
2XL (186-194cm x 116-124cm);
3XL (192-200cm x 124-132cm)
- Qty/Carton : 50

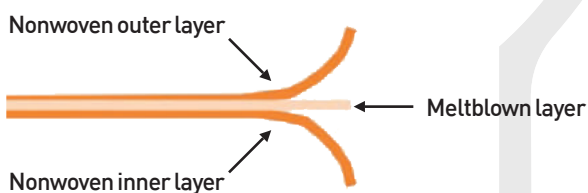

STANDARDS

CE CATEGORY: Type 5 - Particle Tight Clothing
Type 6 - Limited Splash Particle Tight Clothing

Other Colours



Blue Orange

DOBSMS - Blue
DOOSMS - Orange



PRODUCT CODE : DOWSMS



Type 5



Type 6

WA

T (618) 9301 7888
F (618) 9310 7889
E wa@paramountsafety.com.au

MELBOURNE

T (613) 9764 9900
F (613) 9764 9800
E vic@paramountsafety.com.au

SYDNEY

T (612) 9601 3877
F (612) 9601 3899
E nsw@paramountsafety.com.au

BRISBANE

T (617) 3806 2699
F (617) 3806 3266
E qld@paramountsafety.com.au

ADELAIDE

M 0424 504 802
T (613) 9764 9900
F (613) 9764 9800
E sa@paramountsafety.com.au

NEW ZEALAND

T (649) 525 8090
F (649) 523 9773
E nz@paramountsafety.co.nz

PROVEK DISPOSABLE COVERALL

PRODUCT CODE: DOWP

STANDARDS

CE CATEGORY: Chemical Protective Clothing III
 Type 5 - Particle Tight Clothing
 Type 6 - Limited Splash Particle Tight Clothing

Performance Classification of Materials			
Abrasion Resistance	EN 530 Method 2	10 Cycles (Visual Assessment)	1
Flex Cracking Resistance	ISO 7854 Method B	10000 Cycles (Visual Assessment)	4
Trapezoidal Tear Resistance	ISO 9073-4	MD 39.6 N CD 23.6 N	2
Tensile Strength	ISO 13934-1	MD 83.6 N CD 51.0 N	1
Puncture Resistance	EN863	6.22 N	2
Repellency to Liquids - EN368			
30% H ₂ SO ₄	98.2%	3	
10% NaOH	97.5%	3	
o-Xylene	90.6%	2	
Butan-1-ol	95.1%	3	
Resistance to Penetration by Liquids - EN368			
30% H ₂ SO ₄	0.0%	3	
10% NaOH	0.0%	3	
o-Xylene	0.0%	3	
Butan-1-ol	0.0%	3	

WA

T (618) 9301 7888
 F (618) 9310 7889
 E wa@paramountsafety.com.au

MELBOURNE

T (613) 9764 9900
 F (613) 9764 9800
 E vic@paramountsafety.com.au

SYDNEY

T (612) 9601 3877
 F (612) 9601 3899
 E nsw@paramountsafety.com.au

BRISBANE

T (617) 3806 2699
 F (617) 3806 3266
 E qld@paramountsafety.com.au

ADELAIDE

M 0424 504 802
 T (613) 9764 9900
 F (613) 9764 9800
 E sa@paramountsafety.com.au

NEW ZEALAND

T (649) 525 8090
 F (649) 523 9773
 E nz@paramountsafety.co.nz